




Classic Reveal – SPA31

PRODUCT SPECIFICATIONS

Style Name:	Classic Reveal SPA31
Plank/Tile Dimensions:	6 1/8" Wide x 47 1/4" Long x 12 mm Thick
Strips Per Plank:	Single
Pieces per Carton:	8
Pattern Repeat	10
Sq. Ft. per Carton:	16.12
Cartons per Pallet:	60
Weight per Carton:	34.79 lbs
Profile:	UniClic® Technology
Surface Appearance:	Embossed in Register
Finish:	Aluminum Oxide
Finish Rating:	AC4
Core:	HDF (High Density Fiberboard)
Edges/Ends:	Micro Bevel Edge/End
Attached Underlayment:	No
Warranty:	Limited Lifetime Residential Finish Warranty 5 Year Light/Medium Commercial Warranty
Installation Approved:	Floating Only - On, Above or Below Grade 12 mm
ASTM E662-09 Smoke Density (Flaming)	Passes - 450 or Less
ASTM E648-10 Radiant Panel	Meets or exceeds Class 1
ASTM C1028-96 Static Coefficient of Friction	0.58 Dry
Large Ball Impact Resistance	Passes Class 4 Heavy Commercial
Cleanability-Stain Resistance	Nalfa 3.4 Passes Class 4 Heavy Commercial
Static Load	Nalfa 3.1 Passes Class 4 Heavy Commercial
Thickness Swell	Nalfa 3.2 Passes Class 4 Heavy Commercial
Xenon Light Resistance	Nalfa 3.3 Passes 5.0 Class 4
Critical Radiant Flux	Passes ASTM E648-08
Surface Bond	Nalfa 3.10 Passes Class 4 Heavy Commercial

Colors		Quarter Round MQND	Incizo 5 in 1 MINC5	Incizo Base Stair Nose	Stair Nose MSNP
Grey Shadow	01	TBA	TBA	5BASE-04	TBA
Golden Honey	02	TBA	TBA	5BASE-04	TBA
Silver Ivory	03	TBA	TBA	5BASE-04	TBA

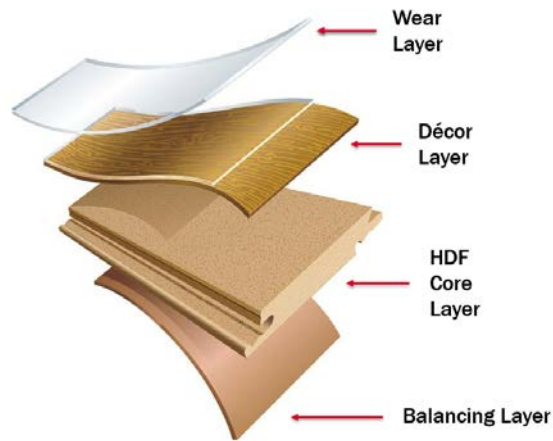

Last Update 5/15/17 TC

We reserve the right without prior notification, to modify specifications, or substitute components as technological advancements or process improvements become available which improve the products performance. Please contact Technical Services at 888-387-9881, option 3 if you have questions regarding these specifications.

All wood and laminate flooring should be protected from intense natural and/or artificial UV light exposure to minimize color change.

Check www.mohawkflooring.com for a copy of our most recent installation instructions before beginning installation.

Complies with California ATCM 93120 (CARB) Emission Requirements

U.S. Lacey Act Compliant

FloorScore Certified*

*Contributes to LEED points