




Painted Allure – SPA37

PRODUCT SPECIFICATIONS

Style Name:	Painted Allure SPA37
Plank/Tile Dimensions:	6 1/8" Wide x 47 1/4" Long x 12 mm Thick
Strips Per Plank:	Single
Pieces per Carton:	8
Pattern Repeat	10
Sq. Ft. per Carton:	16.12
Cartons per Pallet:	60
Weight per Carton:	34.79 lbs
Profile:	UniClic® Technology
Surface Appearance:	Embossed in Register
Finish:	Aluminum Oxide
Finish Rating:	AC3
Core:	HDF (High Density Fiberboard)
Edges/Ends:	Micro Bevel Edge/End
Attached Underlayment:	No
Warranty:	Limited Lifetime Residential Finish Warranty 5 Year Light/Medium Commercial Warranty
Installation Approved:	Floating Only - On, Above or Below Grade 12 mm
ASTM E662-09 Smoke Density (Flaming)	Passes - 450 or Less
ASTM E648-10 Radiant Panel	Meets or exceeds Class 1
ASTM C1028-96 Static Coefficient of Friction	0.58 Dry
Impact Resistance	Passes Class 4 Heavy Commercial
Cleanability-Stain Resistance	Nalfa 3.4 Passes Class 4 Heavy Commercial
Xenon Light Resistance	Nalfa 3.3 Passes 5.0 Class 4
Thickness Swell	Nalfa 3.2 Passes Class 4 Heavy Commercial
Radiant Flux	Passes ASTM E648-08
Surface Bond	Nalfa 3.10 Passes Class 4 Heavy Commercial

Colors		Quarter Round MQND	Incizo 5 in 1 MINCS	Incizo Base Stair Nose	Stair Nose MSNP
English Biscotti	01	TBD	TBD	5BASE-04	TBD
Misty Barn	02	TBD	TBD	5BASE-04	TBD
Grey Castle	03	TBD	TBD	5BASE-04	TBD
Aged Cabin	04	TBD	TBD	5BASE-04	TBD

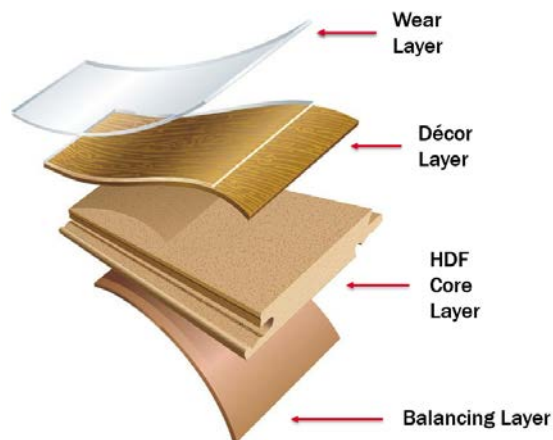

Last Update 5/15/17 TC

We reserve the right without prior notification, to modify specifications, or substitute components as technological advancements or process improvements become available which improve the products performance. Please contact Technical Services at 888-387-9881, option 3 if you have questions regarding these specifications.

All wood and laminate flooring should be protected from intense natural and/or artificial UV light exposure to minimize color change.

Check www.mohawkflooring.com for a copy of our most recent installation instructions before beginning installation.

Complies with California ATCM 93120 (CARB) Emission Requirements
U.S. Lacey Act Compliant
FloorScore Certified*
*Contributes to LEED points