




Artful Touch – SPA29

PRODUCT SPECIFICATIONS

Style Name:	Artful Touch SPA29
Plank/Tile Dimensions:	7 ½" Wide x 47 ¼" Long x 8 mm Thick
Strips Per Plank:	Multi Width
Pieces per Carton:	7
Pattern Repeat	10
Sq. Ft. per Carton:	17.18
Cartons per Pallet:	60
Weight per Carton:	26.35 lbs
Profile:	UniClic® Technology
Surface Appearance:	Random Embossed
Finish:	Aluminum Oxide
Finish Rating:	AC4
Core:	HDF (High Density Fiberboard)
Edges/Ends:	Square Edge/Square End
Attached Underlayment:	No
Warranty:	Limited Lifetime Residential 5 Year Light/Medium Commercial
Installation Approved:	Floating Only - On, Above or Below Grade 8 mm
ASTM E662-09 Smoke Density (Flaming)	Passes - 450 or Less
ASTM E648-10 Radiant Panel	Meets or exceeds Class 1
ASTM C1028-96 Static Coefficient of Friction	0.53 Dry
Impact Resistance	Passes Class 4 Heavy Commercial
Cleanability-Stain Resistance	Passes Class 4 Heavy Commercial Nalfa 3.4
Xenon Light Resistance	Nalfa 3.3 Passes 5.0 Class 4
Thickness Swell	Nalfa 3.2 Passes Class 4 Heavy Commercial
Radiant Flux	Passes ASTM E648-08
Static Coefficient of Friction	Nalfa 3.1 Passes Class 4 Heavy Commercial
Surface Bond	Nalfa 3.10 Passes Class 4 Heavy Commercial

Colors		Quarter Round MQND	Incizo 5 in 1 MINC5	Incizo Base Stair Nose	Stair Nose MSNP
Painted Timber	01	MQND-02982	MINC5-01570	5BASE-02	MSNP-01570
Weathered Grey	02	MQND-02624	MINC5-01386	5BASE-02	MSNP-01386
Silver Dollar	03	MQND-01988	MINC5-02890	5BASE-02	MSNP-02890

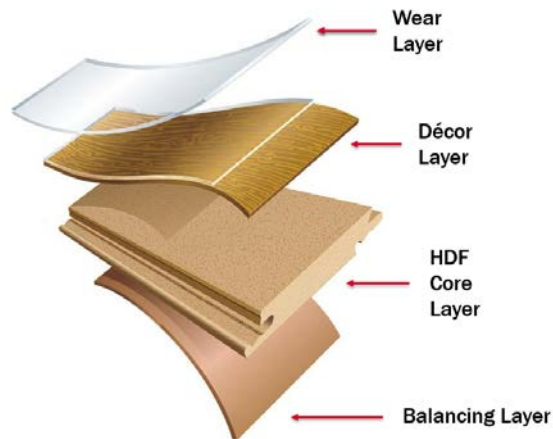

Last Update 5/15/17 TC

We reserve the right without prior notification, to modify specifications, or substitute components as technological advancements or process improvements become available which improve the products performance. Please contact Technical Services at 888-387-9881, option 3 if you have questions regarding these specifications.

All wood and laminate flooring should be protected from intense natural and/or artificial UV light exposure to minimize color change.

Check www.mohawkflooring.com for a copy of our most recent installation instructions before beginning installation.

Complies with California ATCM 93120 (CARB) Emission Requirements
U.S. Lacey Act Compliant
FloorScore Certified*
*Contributes to LEED points