




Brokton – SPA11

PRODUCT SPECIFICATIONS

Style Name:	Brokton SPA11
Plank/Tile Dimensions:	7 1/2" Wide x 47 1/4" Long x 7 mm Thick
Strips Per Plank:	2 Strip
Pieces per Carton:	8
Pattern Repeat	10
Sq. Ft. per Carton:	19.63
Cartons per Pallet:	60
Weight per Carton:	28.38 lbs
Profile:	UniClic® Technology
Surface Appearance:	Random
Finish:	Aluminum Oxide
Finish Rating:	AC3
Core:	HDF (High Density Fiberboard)
Edges/Ends:	Square Edge / Square End
Attached Underlayment:	No
Warranty:	20 Year Residential Finish Warranty
Installation Approved:	On, Above or Below Grade
ASTM E662-09 Smoke Density (Flaming)	Passes – 450 or Less
ASTM E648-10 Radiant Panel	Meets or Exceeds Class 1
ASTM C1028-96 Static Coefficient of Friction	0.54 Dry
Large Ball Impact Resistance	Passes Class 4 Heavy Commercial
Cleanability-Stain Resistance	Passes Class 4 Heavy Commercial Nalfa 3.4
Static Load	Nalfa 3.1 Passes Class 4 Heavy Commercial
Thickness Swell	Nalfa 3.2 Passes Class 4 Heavy Commercial
Xenon Light Resistance	Nalfa 3.3 Passes 5.0 Class 4
Critical Radiant Flux	Passes ASTM E648-08
Surface Bond	Nalfa 3.10 Passes Class 4 Heavy Commercial

Colors		Quarter Round MQND	Stair Nose MSNP	Incizo 5 in 1 MINC5	Incizo Base Stair Nose
Honey Nut Oak	10	MQND-01668	MSNP-01428	MINC5-01428	5BASE BASE1
Café Chic Walnut	11	MQND-01970	MSNP-01104	MINC5-01104	5BASE BASE1
Chocolate Truffle Oak	12	MQND-01958	MSNP-01430	MINC5-01430	5BASE BASE1
Foxwood Merbau	13	MQND-01939	MSNP-01166	MINC5-01166	5BASE BASE1
Pearl Platinum	14	MQND-02627	MSNP-01392	MINC5-01392	5BASE BASE1
Golden Harvest Oak	15	MQND-02361	MSNP-02361	MINC5-03261	5BASE BASE1
Warm Autumn Oak	16	MQND-01951	MSNP-1495	MINC5-01495	5BASE BASE1

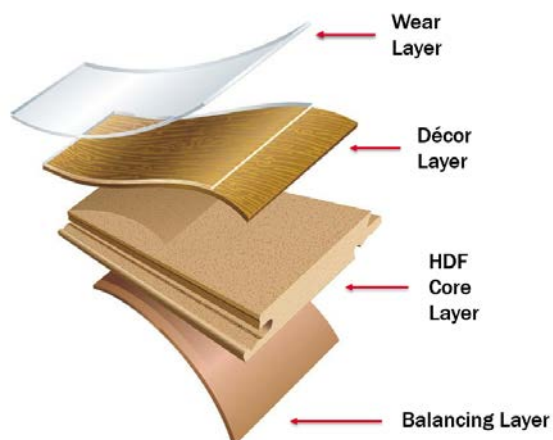

Last Update 8-5-16RF

We reserve the right without prior notification, to modify specifications, or substitute components as technological advancements or process improvements become available which improve the products performance. Please contact Technical Services at 888-387-9881, option 3 if you have questions regarding these specifications.

All wood and laminate flooring should be protected from intense natural and/or artificial UV light exposure to minimize color change.

Check www.Mohawkflooring.com for a copy of our most recent installation instructions before beginning installation

Complies with California ATCM 93120 (CARB) Emission Requirements

U.S. Lacey Act Compliant

FloorScore Certified*

***Contributes to LEED points**